

RESCOM[®]

ELITE

NEW



- Full Duplex
- Intrinsically Safe
- Personal Volume Control
- 3 Mile Range Per User
- Connects up to 10 Users
- Compliant & Certified by Major Industry Standards
- Low Battery Indicator for Entire Team
- Immune to RF Interference
- 5 Year Limited Warranty


SED[®]

Confined Space Communication Leader
Since 1985


HEADSETS




DQ70-206
Dual-Sided Heavy Duty Headset
Rear headband mount with Noise-Attenuating earcup and Noise-Cancelling Boom Mic

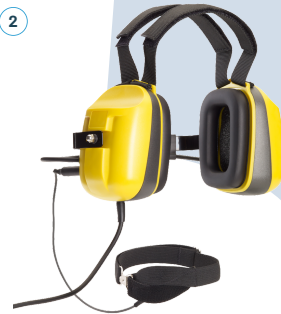


DQ70-208
Dual-Sided Heavy Duty Headset
Rear headband mount with Noise Attenuating earcup and Noise-Rejecting Throat Mic

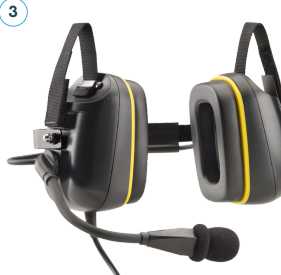

DQ73-206
Dual-Sided Heavy Duty Headset
Hardhat mount with Noise-Attenuating earcup and Noise-Cancelling Boom Mic

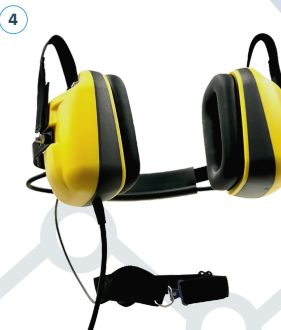

DQ73-208
Dual-Sided Heavy Duty Headset
Hardhat mount with Noise Attenuating earcup and Noise-Rejecting Throat Mic

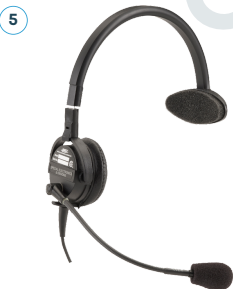

198920
Single-Sided Lightweight Headset
Mesh mounted lightweight headsets with Noise-Cancelling Boom Mic




198921
Single-Sided Lightweight Headset
Low profile, mesh mounted headset with Noise-Rejecting Throat Mic




198922
Single-Sided Watertight Headset with Throat Mic
Low profile, mesh mounted lightweight headsets with Noise-Rejecting Mic




198923
Dual-Sided Watertight Headset
Low profile, mesh mounted lightweight headsets with Noise-Rejecting Throat Mic




198925
Dual-Sided Watertight Headset with Throat Mic
Mesh mounted lightweight headsets with Noise-Rejecting Mic

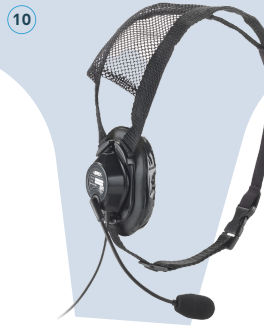

198933
Single-Sided Lightweight Headset
Standard profile, Mesh mounted with Noise-Cancelling Boom Mic

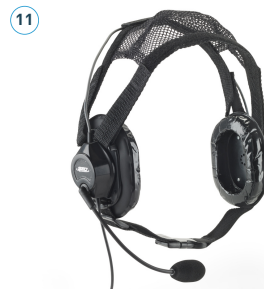

198934
Dual-Sided Lightweight Headset
Standard profile, Mesh mounted with Noise-Cancelling Boom Mic

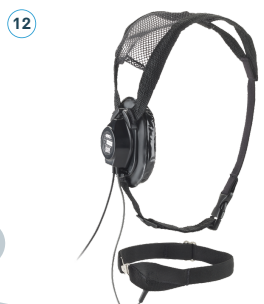

198935
Single-Sided Watertight Headset
Standard profile, mesh mounted with Noise-Rejecting Throat Mic

13



**198936
Dual-Sided Watertight
Headset**

Standard profile, mesh mounted with Noise-Rejecting Throat Mic

14



**HX-A01 and HX-B02
Helmet Headset**

Helmet mounted, lightweight headset with Noise-Cancelling Boom Mic

ACCESSORIES

15



**DMI-S
Master Interface Box**

Centralized battery, On/Off switch, volume control and an industrial grade pouch to mount on belt/harness

20



**DSI-AC/S16
Acoustic Coupler**

An Inter-Operability Interface that allows an isolated interconnection between two intrinsically safe systems

16



**DSI-S
Slave Interface Box**

With volume control and an industrial grade pouch to mount on belt/harness

21



**SCR2N Series
Combined Safety/
Communication Rope™**

Use as a primary or secondary rescue line. Can be submerged 35ft in water

17



**JBI Series
2-10 Port Junction Box**

Watertight connectors in a sleek and sturdy ABS box

22



**EC2MMD02 Series
Communication Cable**

A rugged DuraCORE™ cable with a SEDFLEX™ jacket ensuring flexibility in harsh environments

18



**V-MIC™
Victim Locator Mic**

Super sensitive Mic used for victim location during a rescue

23



**C32D
Rope/Cable Coupler**

Used to connect two Rescom communication ropes (21) or cables (22) together

19



**RSP-05
Responder 5***

Water resistant speaker box with a PTT Mic allows local monitoring, eliminating the need for headsets

24



**C11
Bulkhead Pass-through**

Allows connection through steel vessel or walls of thickness up to 1". Ideal for aircraft fuel cell installation

ACCESSORIES

25



C09

T-connector

Allows "Daisy Chain" of cable or rope connections, Can be attached directly to DMI or DSI or Junction Box

26



040901 Series Push-To-Mute (PTM) or Push-To-Talk (PTT) Switch

Ideal for Supervisors. Can be Locked On or used as a momentary action

27



RCC-01 or RCC-02 Portable Cable Reel

Built-in junction box for continuous communication with pneumatic tires for uneven surfaces

28



330002 - S or M size Rescom Rope bag

(S:100ft and M:300ft rope) Sturdy fabric with a clear pouch for rope logs, carry handle and shoulder strap.


CABLE KITS

ROPE + CABLE KITS

		Cable	DMI	DSI	198902	198913	Junction Box	Equipment Case
RK2MC-030	2 Man	100' x 1	1	1	1	1	6 Port	Medium
RK2MC-091	2 Man	300' x 1	1	1	1	1	6 Port	Medium
RK3MC-030	3 Man	100' x 2 + 50' x 1	1	2	1	2	6 Port	Medium
RK3MC-091	3 Man	300' x 2 + 50' x 1	1	2	1	2	6 Port	Medium
RK5MC-030	5 Man	100' x 4 + 50' x 1	1	4	1	4	6 Port	Medium
RK5MC-091	5 Man	300' x 4 + 50' x 1	1	4	1	4	6 Port	Medium
RK7MC-030	7 Man	100' x 6 + 50' x 1	1	6	1	6	8 Port	Large
RK7MC-091	7 Man	300' x 6 + 50' x 1	1	6	1	6	8 Port	Large

		Rope	Cable	DMI	DSI	198902	198913	Junction Box	Rope Bags	Equipment Case
RK2MR-030	2 Man	100' x 1	50' x 1	1	1	1	1	6 Port	1 x Small	Medium
RK2MR-091	2 Man	300' x 1	50' x 1	1	1	1	1	6 Port	1 x Medium	Medium
RK3MR-030	3 Man	100' x 2	50' x 1	1	2	1	2	6 Port	2 x Small	Medium
RK3MR-091	3 Man	300' x 2	50' x 1	1	2	1	2	6 Port	2 x Medium	Medium
RK5MR-030	5 Man	100' x 4	50' x 1	1	4	1	4	6 Port	4 x Small	Medium
RK5MR-091	5 Man	300' x 4	50' x 1	1	4	1	4	6 Port	4 x Medium	Medium
RK7MR-030	7 Man	100' x 6	50' x 1	1	6	1	6	8 Port	6 x Small	Large
RK7MR-091	7 Man	300' x 6	50' x 1	1	6	1	6	8 Port	6 x Medium	Large

TYPICAL CONNECTION DIAGRAM

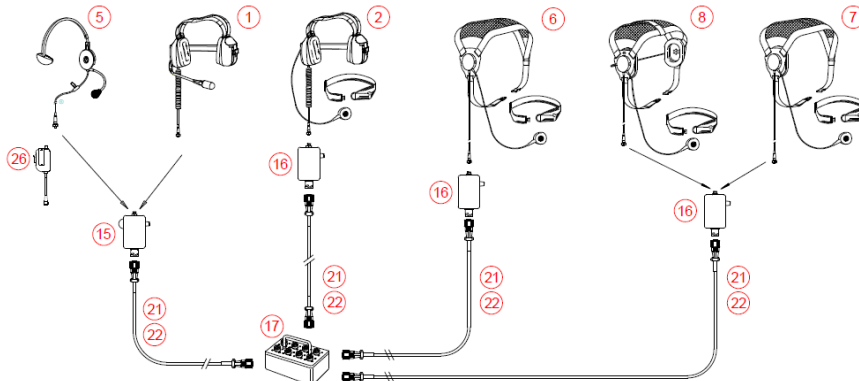

BATTERY LIFE FOR 3 AA BATTERIES:

3 Headsets= 108-138 hours
5 Headsets= 64-82 hours
7 Headsets= 46-58 hours
10 Headsets= 27-34 hours

CERTIFICATIONS



ISO 9001:2015

SCAN ME!

