

## ACCESSORIES

25



**RCC-03 or RCC-04  
Portable Cable Reel**  
Built-in junction box for continuous communication with pneumatic tires for uneven surfaces

26



**330002 - S or M size  
Rescom Rope bag**  
(S:100ft and M:300ft rope)  
Sturdy fabric with a clear pouch for rope logs, carry handle and shoulder strap


## CABLE KITS

## ROPE + CABLE KITS

		Cable	DMI	DSI	198920	198935	Junction Box	Equipment Case
RKE2MC-030	2 Man	100' x 1	1	1	1	1	4 Port	Medium
RKE2MC-091	2 Man	300' x 1	1	1	1	1	4 Port	Medium
RKE3MC-030	3 Man	100' x 2 + 50' x 1	1	2	1	2	4 Port	Medium
RKE3MC-091	3 Man	300' x 2 + 50' x 1	1	2	1	2	4 Port	Medium
RKE5MC-030	5 Man	100' x 4 + 50' x 1	1	4	1	4	6 Port	Large
RKE5MC-091	5 Man	300' x 4 + 50' x 1	1	4	1	4	6 Port	Large
RKE7MC-030	7 Man	100' x 6 + 50' x 1	1	6	1	6	8 Port	Large
RKE7MC-091	7 Man	300' x 6 + 50' x 1	1	6	1	6	8 Port	Large

		Rope	Cable	DMI	DSI	198920	198935	Junction Box	Rope Bags	Equipment Case
RKE2MR-030	2 Man	100' x 1	50' x 1	1	1	1	1	4 Port	1 x Small	Medium
RKE2MR-091	2 Man	300' x 1	50' x 1	1	1	1	1	4 Port	1 x Medium	Medium
RKE3MR-030	3 Man	100' x 2	50' x 1	1	2	1	2	4 Port	2 x Small	Medium
RKE3MR-091	3 Man	300' x 2	50' x 1	1	2	1	2	4 Port	2 x Medium	Medium
RKE5MR-030	5 Man	100' x 4	50' x 1	1	4	1	4	6 Port	4 x Small	Large
RKE5MR-091	5 Man	300' x 4	50' x 1	1	4	1	4	6 Port	4 x Medium	Large
RKE7MR-030	7 Man	100' x 6	50' x 1	1	6	1	6	8 Port	6 x Small	Large
RKE7MR-091	7 Man	300' x 6	50' x 1	1	6	1	6	8 Port	6 x Medium	Large

## TYPICAL CONNECTION DIAGRAM

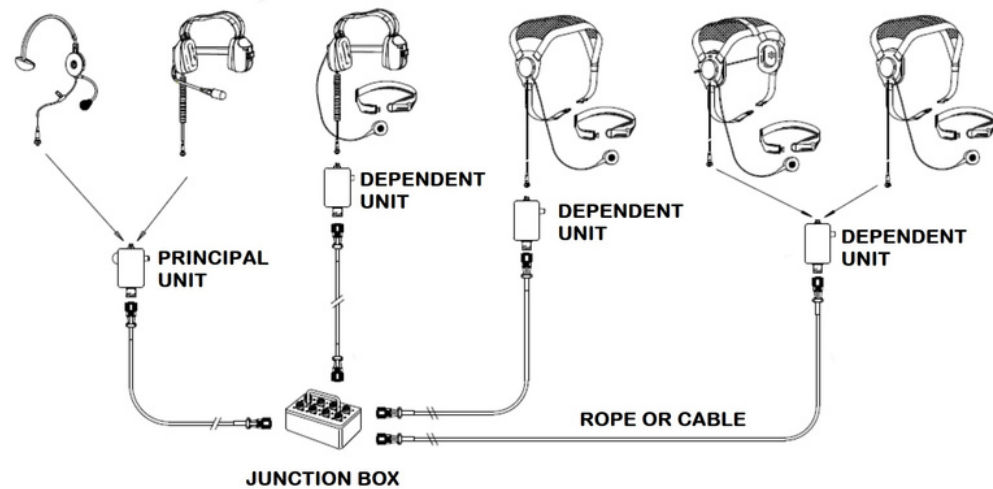

## CERTIFICATIONS



ATEX: ATX35707  
IECEX: IECEX QPS 21.0006X



QPS: LR1506



Combined Safety/Communication Rope™ is compliant under Class - 7216 82

SCAN ME!



CE 2876 II 1 G Ex ia IIC T3 Ga  
CE 2876 I M1 G Ex ia I 151°C Ma

I.S. Class I, Div-1, GRP ABCD T3  
Ex ia IIC T3 Ga Class I, Zone 0  
AEx ia IIC T3 Ga, Ex ia IIC T3 Ga; Ex ia I T151°C Ma

NOTE: Intrinsically Safe rated for prolonged exposure to hazardous gas atmospheres

1-800-665-2740 | +1-519-396-8555 | www.sedtechnologies.com

# RESCOM

## ELITE

NEW PRODUCT



- Full Duplex
- Intrinsically Safe
- Personal Volume Control
- 3 Mile Range Per User
- Connects up to 10 Users
- Compliant & Certified by Major Industry Standards
- Low Battery Indicator for Entire Team
- Immune to RF Interference
- 5 Year Limited Warranty

# SED

Confined Space Communication  
Leader Since 1985



# HEADSETS




**DQ70-206  
Dual-Sided Heavy Duty Headset**  
Rear headband mount with Noise-Attenuating earcup and Noise-Cancelling Boom Mic



**DQ70-208  
Dual-Sided Heavy Duty Headset**  
Rear headband mount with Noise Attenuating earcup and Noise-Rejecting Throat Mic




**DQ73-206  
Dual-Sided Heavy Duty Headset**  
Hardhat mount with Noise-Attenuating earcup and Noise-Cancelling Boom Mic



**DQ73-208  
Dual-Sided Heavy Duty Headset**  
Hardhat mount with Noise Attenuating earcup and Noise-Rejecting Throat Mic




**198920  
Single-Sided Lightweight Headset**  
Lightweight headset with Noise-Cancelling Boom Mic (Available in headband and mesh mounted variants)




**198921  
Single-Sided Lightweight Headset**  
Lowest profile, mesh mounted headset with Noise-Rejecting Throat Mic




**198933  
Single-Sided Lightweight Headset**  
Low profile, Mesh mounted with Noise-Cancelling Boom Mic



**198934  
Dual-Sided Lightweight Headset**  
Low profile, Mesh mounted with Noise-Cancelling Boom Mic



**198935  
Single-Sided Watertight Headset**  
Low profile, mesh mounted with Noise-Rejecting Throat Mic



**198936  
Dual-Sided Watertight Headset**  
Low profile, mesh mounted with Noise-Rejecting Throat Mic



**HH-A01 for Rosenbauer Heros Titan Pro and HH-B01 for Pacific F15**  
Helmet mounted, lightweight headset with Noise-Cancelling Boom Mic

**BATTERY LIFE FOR 3 AA BATTERIES:**

- 2 Headsets = 160-210 hours
- 3 Headsets = 108-138 hours
- 5 Headsets = 64-82 hours
- 7 Headsets = 46-58 hours
- 10 Headsets = 27-34 hours

# ACCESSORIES



**DMI-E  
Primary Interface Box**  
Centralized battery, On/Off switch, volume control and an industrial grade pouch to mount on belt/harness



**DSI-E  
Dependent Interface Box**  
With volume control and an industrial grade pouch to mount on belt/harness



**JBI Series  
4-8 Port Junction Box**  
Sleek and sturdy ABS box with watertight connectors  
**JBI-4HC:** 4 Port  
**JBI-6HC:** 6 Port  
**JBI-8HC:** 8 Port



**V-MIC™ (DSI-EVM)  
Victim Locator Mic**  
Super sensitive Mic used for victim location during a rescue



**RSP-05  
Responder 5\***  
Water resistant speaker box with a PTT Mic allows local monitoring, eliminating the need for headsets



**DSI-EAC  
Acoustic Coupler**  
An Inter-Operability Interface that allows an isolated interconnection between two intrinsically safe systems



**SCR2N Series  
Combined Safety/Communication Rope™**  
Use as a primary or secondary rescue line. Can be submerged 35ft in water



**EC2MMD02 Series  
Communication Cable**  
A rugged DuraCORE™ cable with a SEDFLEX™ jacket ensures flexibility in harsh environments



**C32D  
Rope/Cable Coupler**  
Used to connect two Rescom communication ropes (19) or cables (20) together



**C11  
Bulkhead Pass-through**  
Allows connection through steel vessel or walls of thickness up to 1". Ideal for aircraft fuel cell installation



**C09  
T-connector**  
Allows "Daisy Chain" of cable or rope connections, Can be attached directly to DMI-E or DSI-E or Junction Box



**040901 Series  
Push-To-Mute (PTM) or Push-To-Talk (PTT)**  
Ideal for Supervisors. Can be Locked "On" or used as a momentary action